

AVENUE



Mirrella Tile's Décor Avenue Ceramic Tiles combine modern design with tactile elegance, bringing a refined architectural presence to any interior space.

Featuring a genuine 3D ribbed surface with high-definition detailing and a soft, cotton-like finish, these 12x36-inch tiles create a striking sense of movement and dimension across the wall.

The collection offers a versatile color palette — Azul (Blue), Verde (Green), Vision (Pinky Beige), and Natural (White) — making it suitable for contemporary bathrooms, feature walls, and sophisticated commercial environments.


Designed to elevate both style and atmosphere, Décor Avenue transforms ordinary spaces into distinctive visual statements.



WWW.MIRRELLA.COM






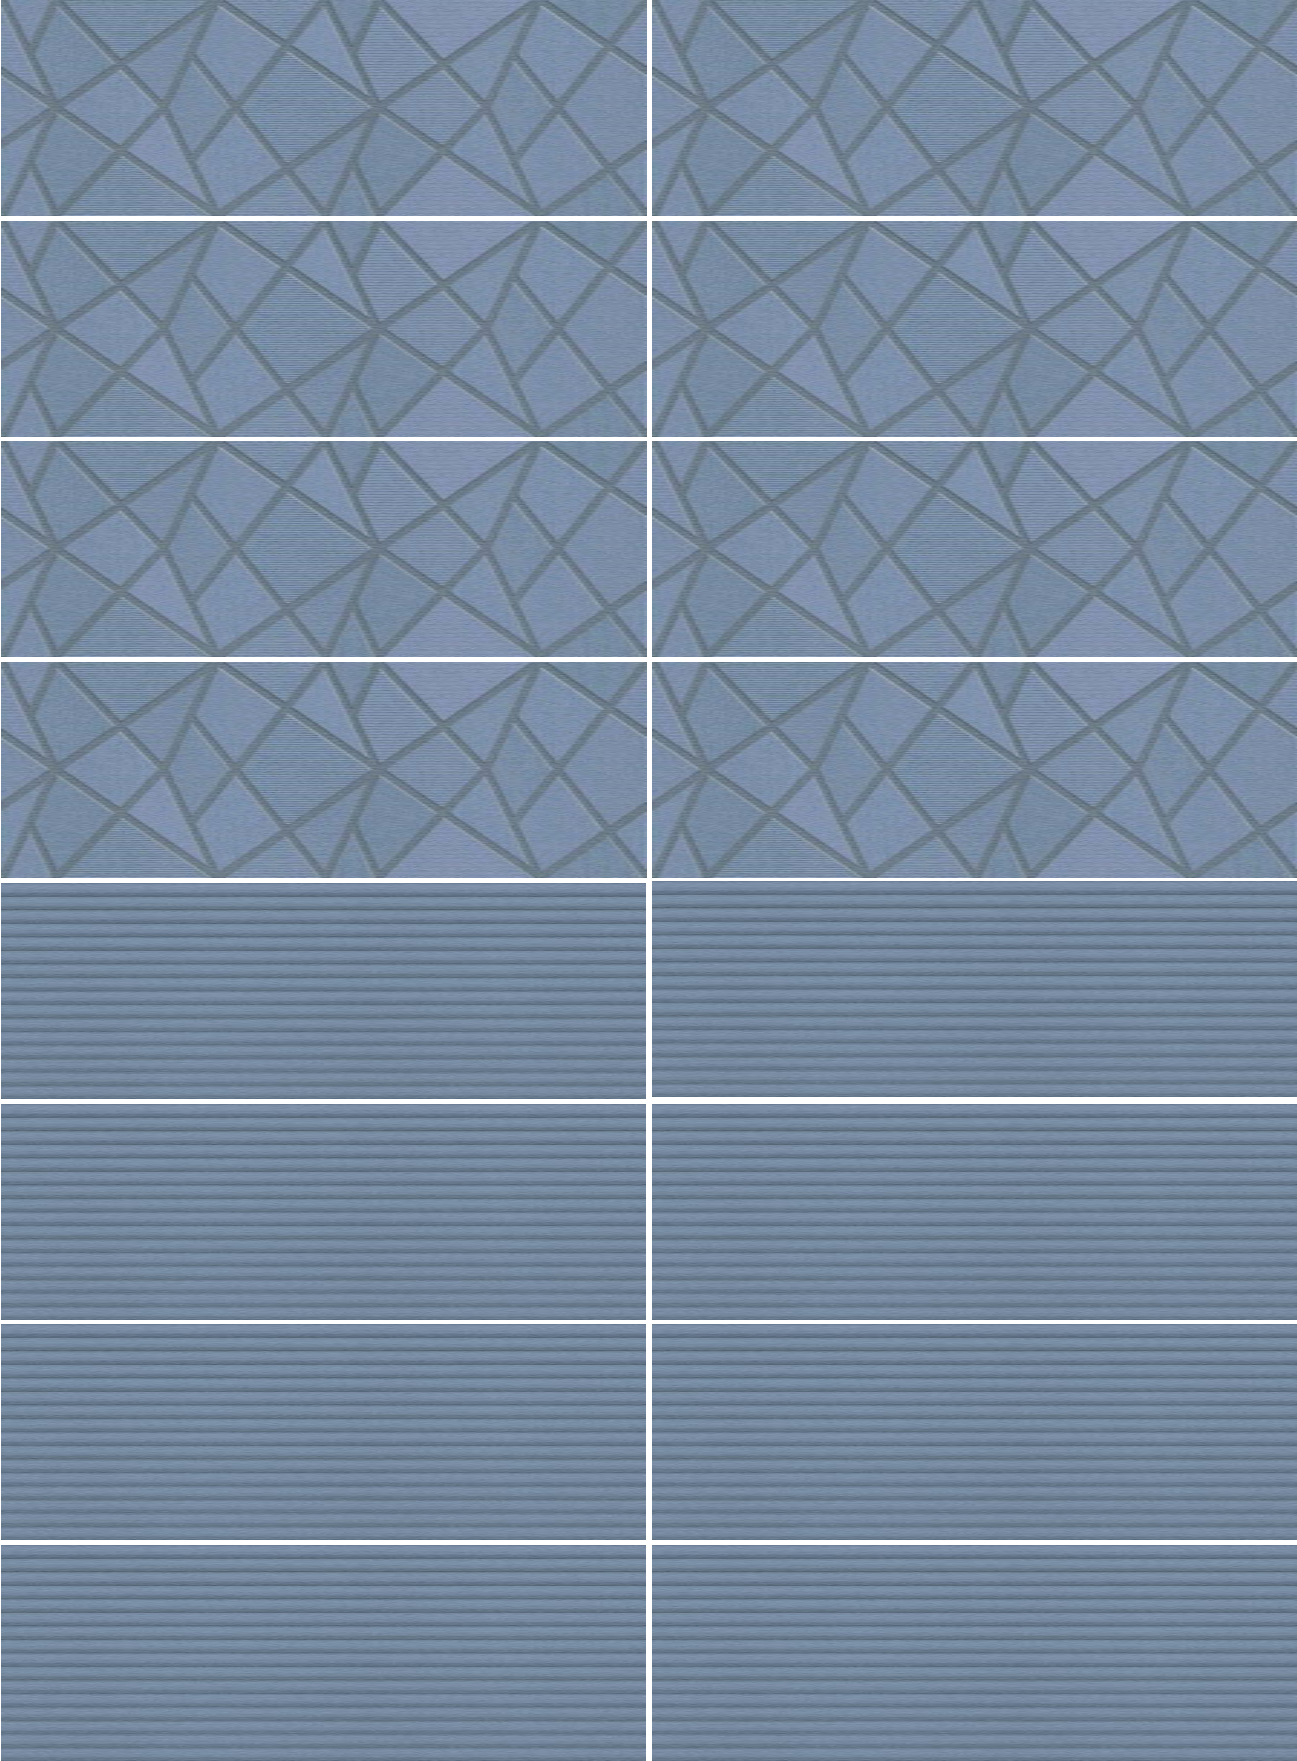

Avenue Art Verde 30x90 (12"x36"), Avenue Concept Verde 30x90 (12"x36")


CHROMATIC RANGE

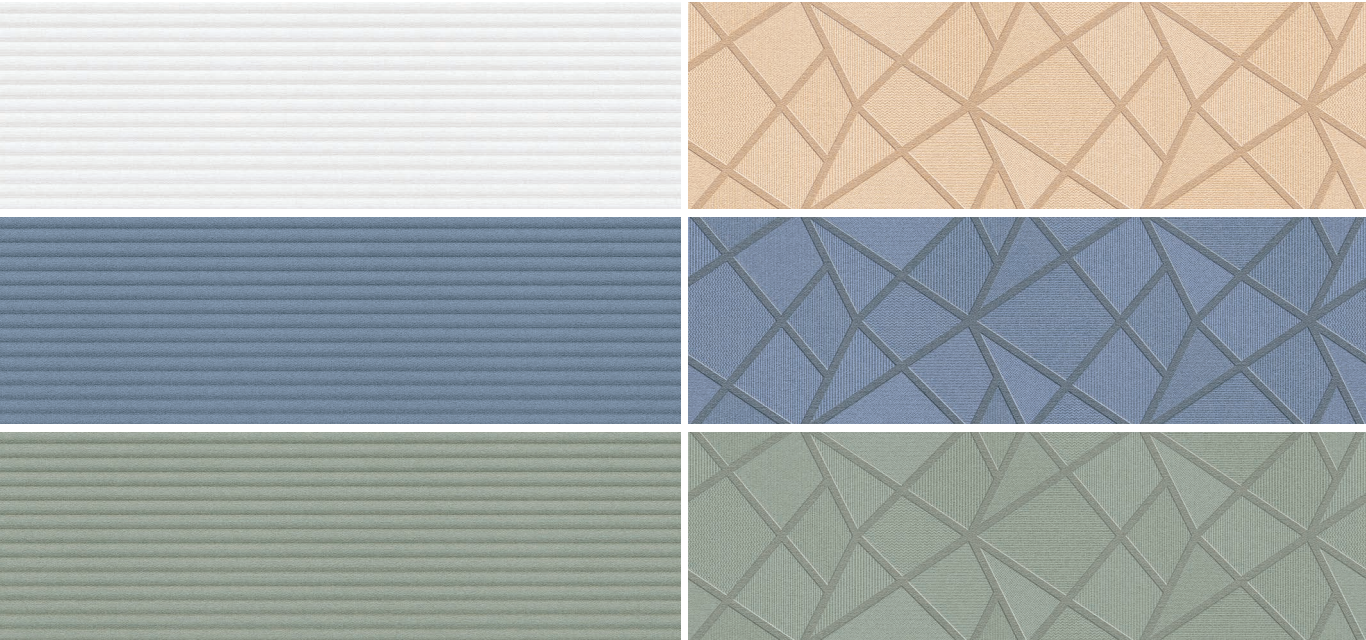

WHITE BODY TILES	
30x90 (12"x36")	1 pattern
30x90 (12"x36") Concept	1 pattern
30x90 (12"x36") Art	1 pattern

GRAPHIC VARIETY



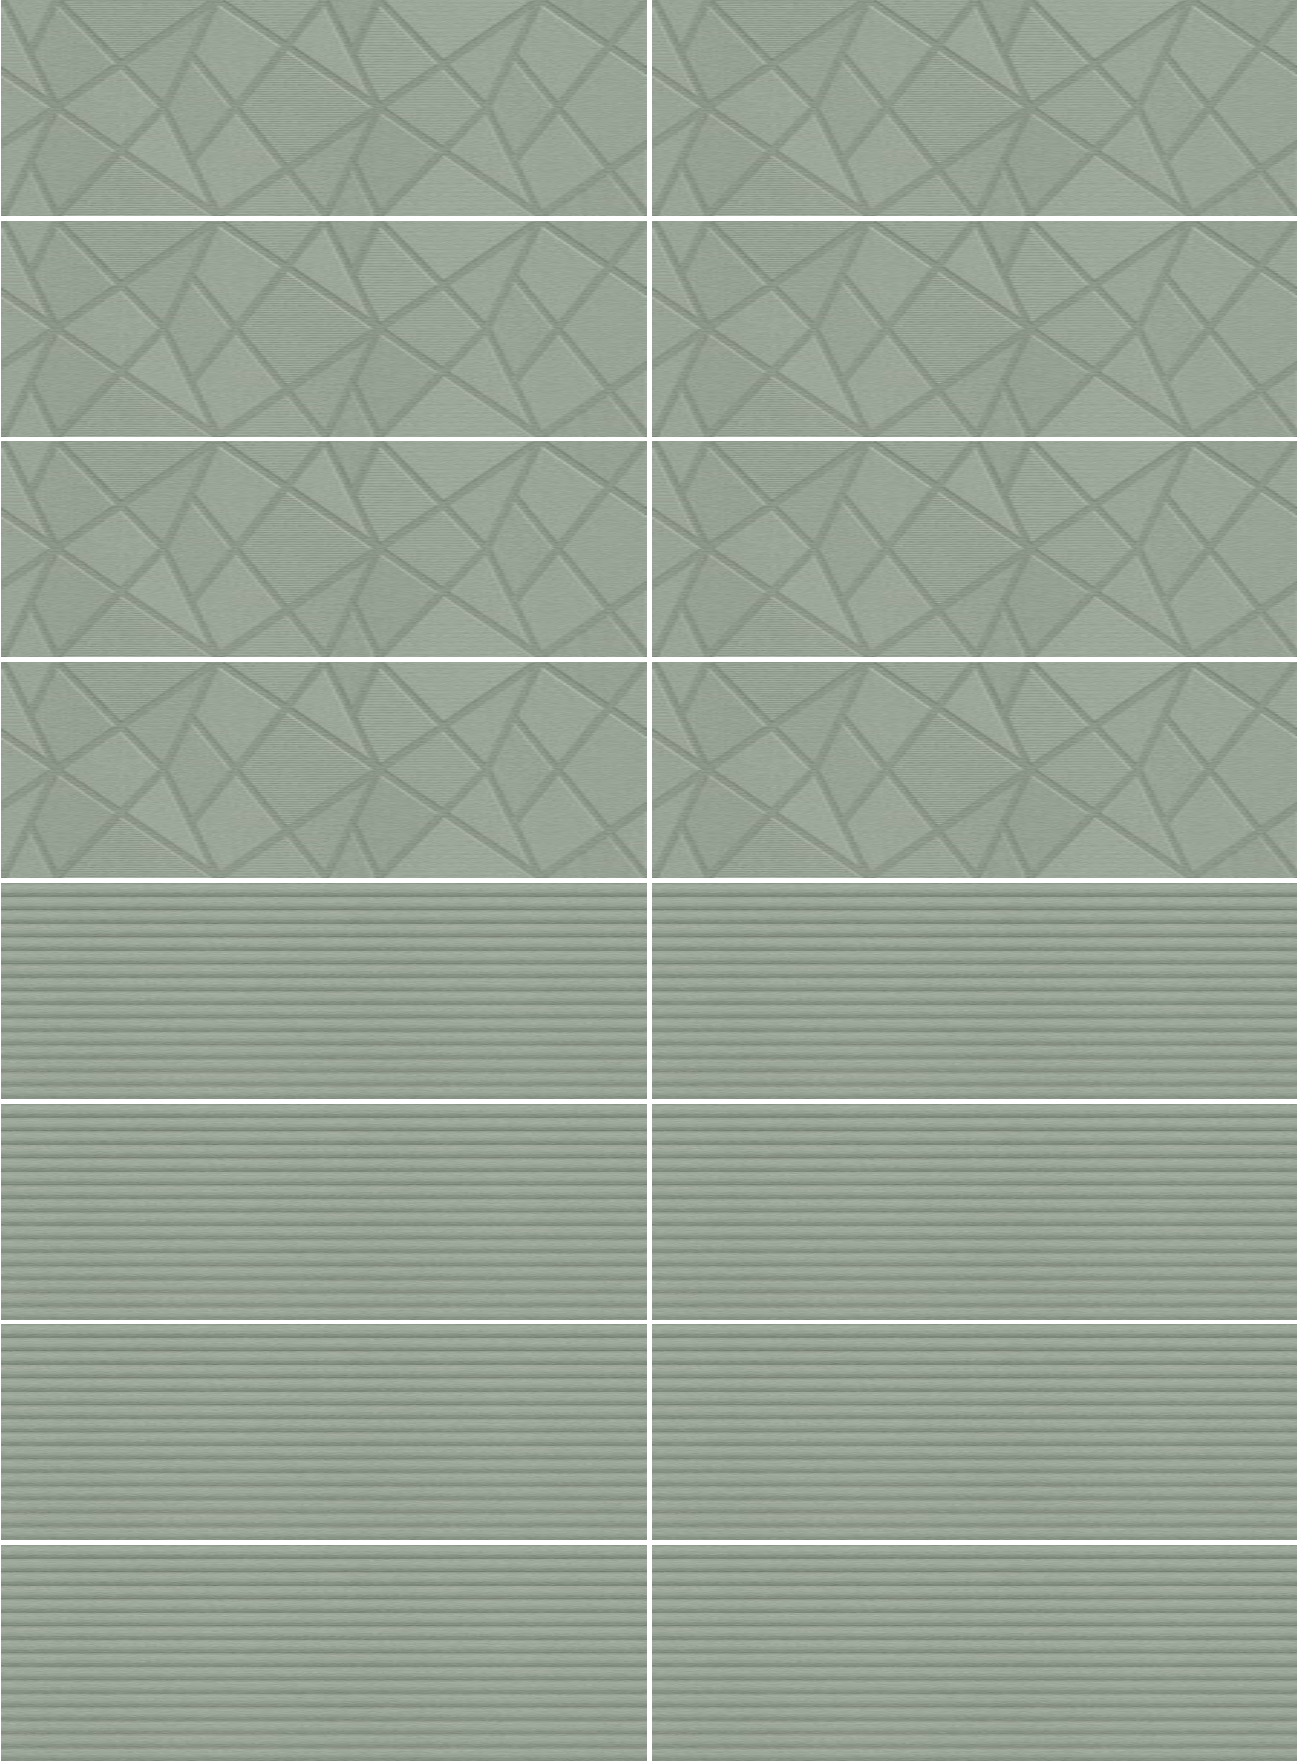

Avenue Art Verde 30x90 (12"x36"), Avenue Concept Verde 30x90 (12"x36")

CHROMATIC RANGE



GRAPHIC VARIETY


WHITE BODY TILES	
30x90 (12"x36")	1 pattern
30x90 (12"x36") Concept	1 pattern
30x90 (12"x36") Art	1 pattern









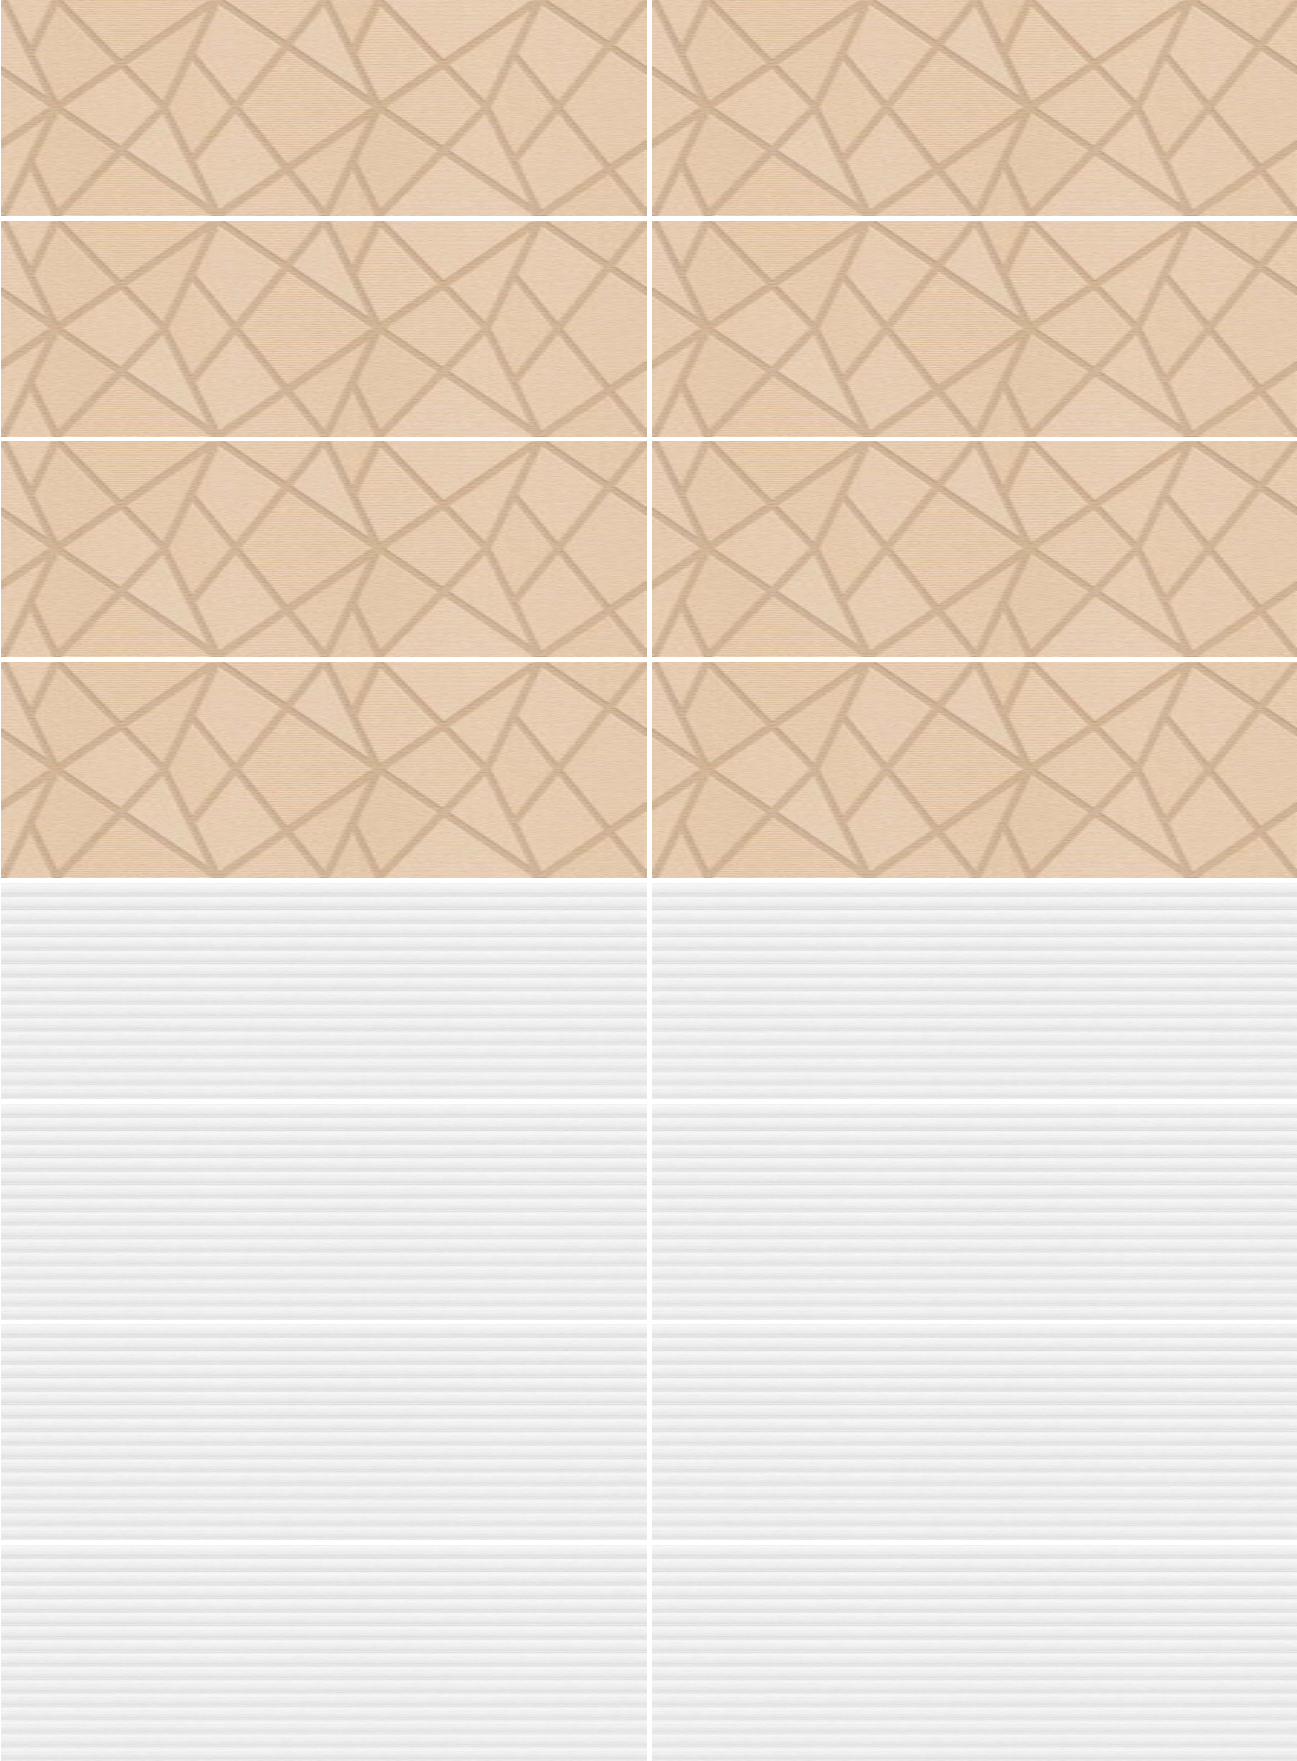

Avenue Art Verde 30x90 (12"x36"), Avenue Concept Verde 30x90 (12"x36")

CHROMATIC RANGE



GRAPHIC VARIETY

WHITE BODY TILES		
30x90 (12"x36")		1 pattern
30x90 (12"x36") Concept		1 pattern
30x90 (12"x36") Art		1 pattern













WHITE BODY WALL TILES



12"x36" 30x90


CONCEPT NATURAL 12"x36"



CONCEPT VERDE 12"x36"



ART VERDE 12"x36"

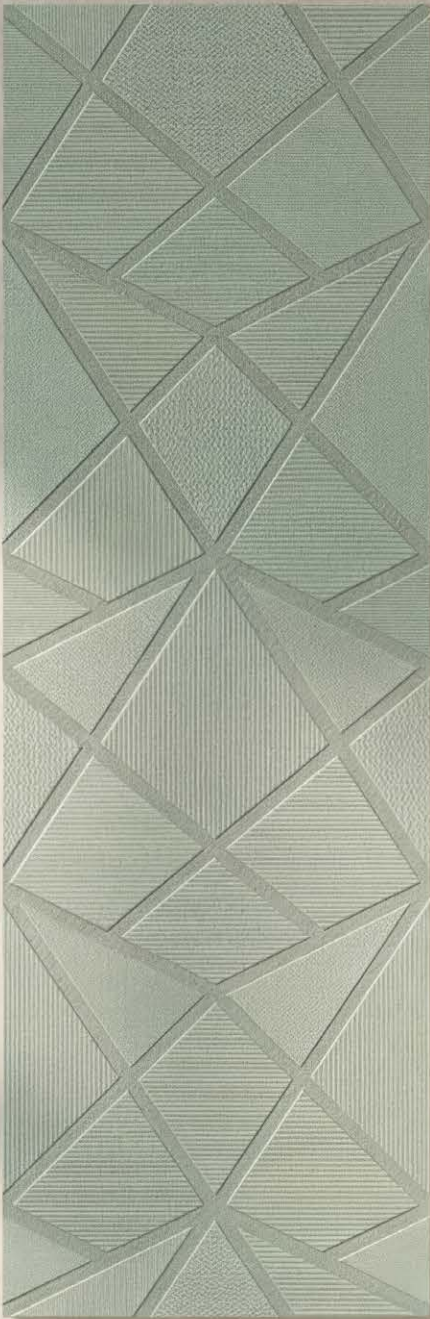

ART VISÓN 12"x36"



ART AZUL 12"x36"



CONCEPT AZUL 12"x36"



TECHNICAL DATA OF PRODUCT

CODE	ITEM	FORMAT	GROUP
	AVENUE COLLECTION	30 X 90	BIII - Annex L - DOP PBREVBIII-001

BODY	WHITE BODY WALL TILE	CLASS	Glazed
FINISH	RECTIFIED PRODUCT WITH SHADE VARIATION (V2)		
RECOMMENDATIONS FOR USE	Interior wall tiles		

2

TECHNICAL SPECIFICATIONS OF THE PRODUCT AS PER THE NORMS ISO 13006

DIMENSION		TEST-NORM	NORM ISO 13006		Avenue Collection	
	LENGTH	ISO 10545-2	±0,3%	±1,00mm	±0,06%	G: 898,0±0,50mm
	WIDTH	ISO 10545-2	±0,3%	±0,89mm	±0,17%	G: 298,0±0,50mm
	THICKNESS	ISO 10545-2	±5,00%	±0,50mm	±5,00%	9,8 ±0,49mm
	STRAIGHTNESS OF SIDES	ISO 10545-2	±0,3%	±0,80mm	±0,07%	≤0,60 mm
	SQUARENESS	ISO 10545-2	±0,3%	±1,50mm	±0,12%	≤1,10 mm
	LATERAL SURFACE FLATNESS / WARPAGE	ISO 10545-2	±0,4%	± 1,80mm	+0,12% / -0,06%	+1,10mm / -0,50mm

PHYSICAL PROPERTIES		TEST-NORM	PRESCRIBED VALUE OF NORM	
	SLIP RESISTANCE	EN 16165 Annex A	Manufacturer's declaration	NOT APPLICABLE
		EN 16165 Annex B	Manufacturer's declaration	NOT APPLICABLE
		EN 16165 Annex C	Manufacturer's declaration	NOT APPLICABLE
		ANSI A137: DCOF	Manufacturer's declaration	NOT APPLICABLE
	WATER ABSORPTION	ISO 10545-3	>10%	12% < E < 18%
	BREAKING STRENGTH	ISO 10545-4	600 N	600 N
	MODULUS OF RUPTURE	ISO 10545-4	12 N/mm²	12 N/mm²
	IMPACTO	ISO 10545-5	Manufacturer's declaration	NOT APPLICABLE
	RESISTANCE TO ABRASION	NOT APPLICABLE	NOT APPLICABLE	NOT APPLICABLE
	COEFFICIENT OF EXPANSION	ISO 10545-8	9 · 10 ⁻⁶ K ⁻¹	6,5 · 10 ⁻⁶ K ⁻¹
	THERMAL RESISTANCE	ISO 10545-9	Manufacturer's declaration	RESISTS
	CRAZING RESISTANCE	ISO 10545-11	Required	RESISTS
	FROST RESISTANCE	ISO 10545-12	Manufacturer's declaration	NOT APPLICABLE

CHEMICAL PROPERTIES			TEST-NORM	NORM ISO 13006	
	RESISTANCE TO ACIDS (WEAK)	CITRIC ACID	ISO 10545-13	Manufacturer's declaration	LA
		HYDROCHLORIC ACID	ISO 10545-13	Manufacturer's declaration	LA
		POTASSIUM HYDROXIDE (ÁLKALI)	ISO 10545-13	Manufacturer's declaration	LA
	RESISTANCE TO ACIDS (STRONG)	LACTIC ACID	ISO 10545-13	Manufacturer's declaration	HA
		HYDROCHLORIC ACID	ISO 10545-13	Manufacturer's declaration	HB
		POTASSIUM HYDROXIDE (ÁLKALI)	ISO 10545-13	Manufacturer's declaration	HA
			ISO 10545-13	Minimum B	A
	RESISTANCE TO HOUSEHOLD CLEANING PRODUCTS		ISO 10545-13	Minimum B	A
	RESISTANCE TO STAINING		ISO 10545-14	Minimum 3	5


TECHNICAL DATA OF PRODUCT

CODE	ITEM	FORMAT	GROUP
	AVENUE COLLECTION	30 X 90	BIII - Annex L - DOP PBREVBIII-001

BODY	WHITE BODY WALL TILE	CLASS	Glazed
FINISH	RECTIFIED PRODUCT WITH SHADE VARIATION (V2)		
RECOMMENDATIONS FOR USE	Interior wall tiles		
FIXING	Minimal grout joint 1,5 mm. Do not bond. Not for outdoor use.		
AREA OF USAGE	Interiors		
PATTERN			

2



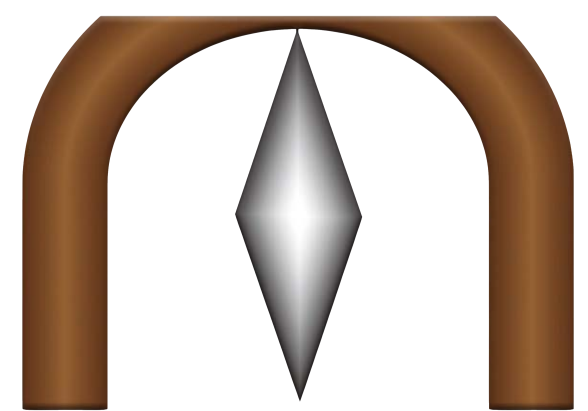

MIRRELLA
TILE

WWW.MIRRELLA.COM