

URBAN
SCRATCH

SHINING DESIGN

SIZES

THICKNESSES

FINISH



1200x2780 / 48"x110"



1200x1200 / 48"x48"



600x1200 / 24"x48"




600x600 / 24"x24"




300x600 / 12"x24"



150x600 / 6"x24"




6 mm



9 mm

SPAZZOLATA

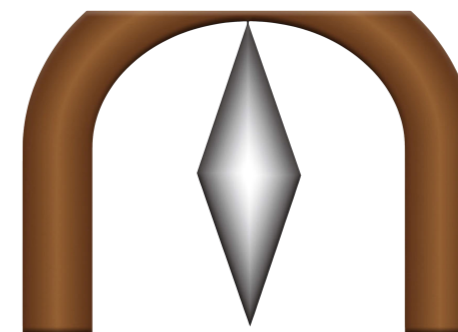

**MIRRELLA
TILE**



**LY01
PALLADIUM**

**LY04
VENOM**

**LY08
PUMPKIN**

**LY07
INDIO**

**LY06
VIRIDIUM**

WWW.MIRRELLA.COM

FRESH BLUE



INDIO

LY07 SP 600x1200 / 24"x48"



WALL . INDIO LY07 SP 600x1200 / 24"x48"

FLOOR . AFTERGLOW LY05 SP 150x600 / 6"x24"

INTENSE COTTO



PUMPKIN

LY08 SP 600x1200 / 24"x48"



WALL . PUMPKIN LY08 SP 600x1200 / 24"x48"

WALL . PUMPKIN LY08 SP 600x1200 / 24"x48"
FLOOR . NIMBUS LY02 SP 600x600 / 24"x24"
SHOWER . NIMBUS LY02 SP 1200x2780 / 48"x110"



CLEAR AND BRIGHT



PALLADIUM

LY01 SP 1200x2780 / 48"x110"



FLOOR . PALLADIUM LY01 SP 600x1200 / 24"x48"



WALL . PALLADIUM LY01 SP 1200x2780 / 48"x110"
FLOOR . PALLADIUM LY01 SP 600x600 / 24"x24"
BENCH . JEWELS RAYMI JW16 LUC





WALL . PALLADIUM LY01 SP 1200x2780 / 48"x110"
FLOOR . NIMBUS LY02 SP 1200x1200 / 48"x48"
COUNTER . VENOM LY04 SP



VELVET DARK



VENOM

LY04 SP 1200x2780 / 48"x110"




WALL . VENOM LY04 SP 1200x2780 / 48"x110"

FLOOR . JURUPA WILD JP05 NAT 200x1200 / 8"x48"



WALL . ESPQIR FROID LUC 1200x2780 / 48"x110"
FLOOR . VENOM LY04 SP 600x600 / 24"x24"
BENCH. VIRIDIUM LY06 - INDIO LY07 - EXCALIBUR LY03

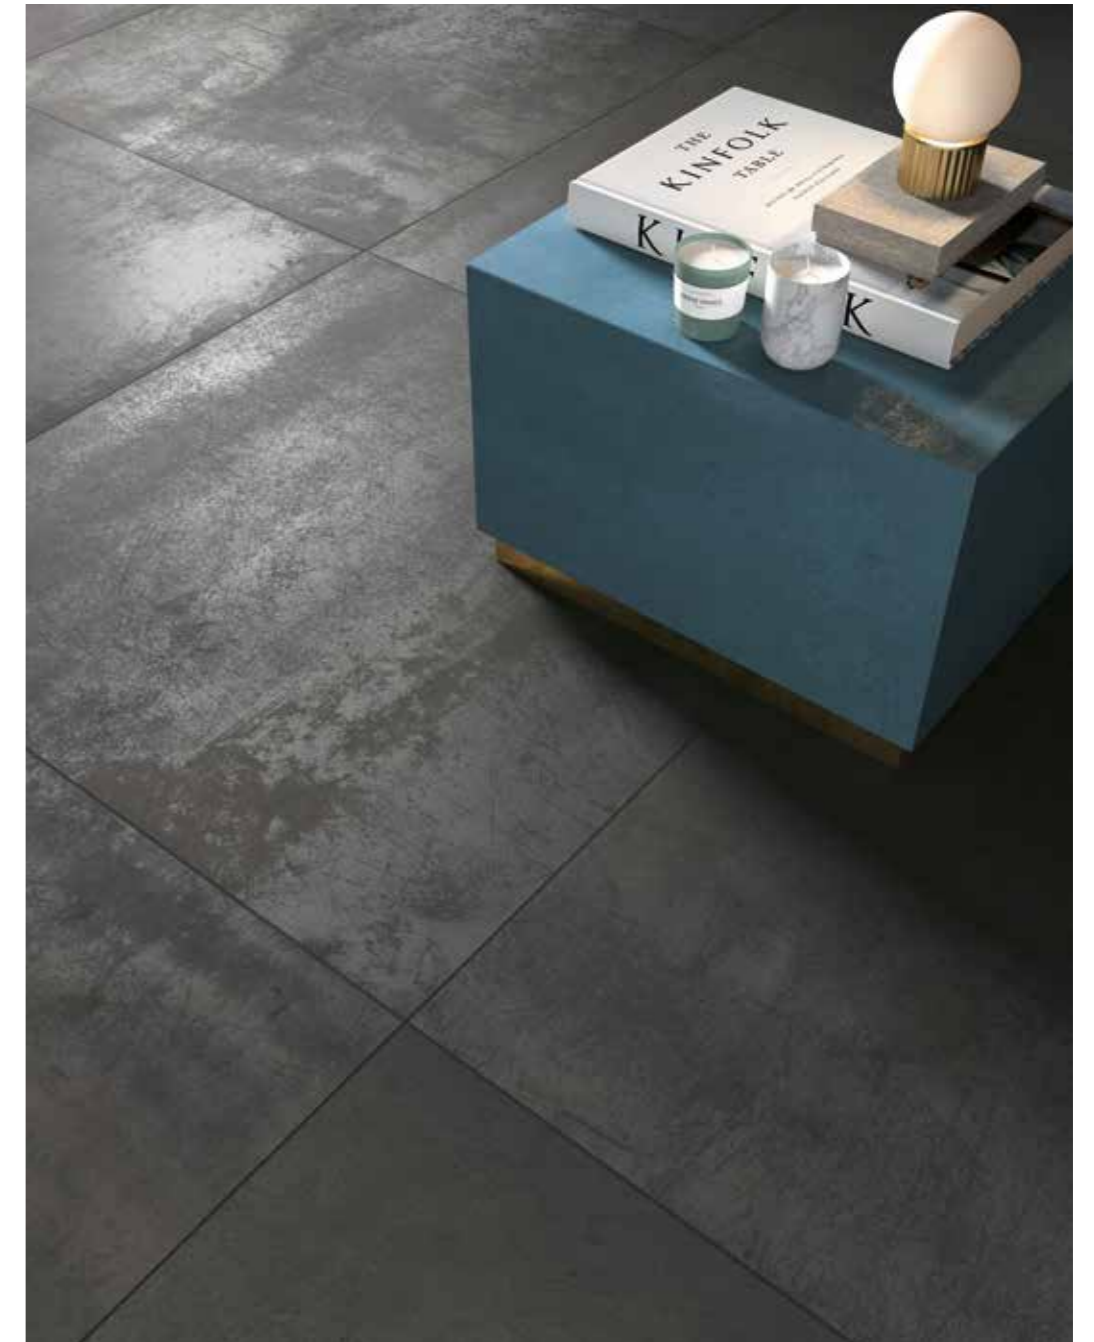

SOFT GREEN



VIRIDIUM

LY06 SP 600x1200 / 24"x48"



FLOOR . VIRIDIUM LY06 SP 600x1200 / 24"x48"

TABLE . NIMBUS LY02 SP



WALL .
NIMBUS LY02 SP 1200x2780 / 48"x110"

FLOOR .
VIRIDIUM LY06 SP 600x1200 / 24"x48"

TABLE .
NIMBUS LY02 SP

COUNTER .
JURUPA CAMP JP04 NAT 200x1200 / 8"x48"

PALLADIUM
LY01

6 mm

1200x2780 / 48"x110"
SP SQ

9 mm

1200x1200 / 48"x48"
SP SQ

600x1200 / 24"x48"
SP SQ

600x600 / 24"x24"
SP SQ

300x600 / 12"x24"
SP SQ

150x600 / 6"x24"
SP SQ



Stucchi consigliati
Recommended grouts

KERAKOLL	03	
MAPEI	111 Grigio Argento	
LATICRETE	88 Silver Shadow	



VENOM
LY04

6 mm

1200x2780 / 48"x110"
SP SQ

9 mm

1200x1200 / 48"x48"
SP SQ

600x1200 / 24"x48"
SP SQ

600x600 / 24"x24"
SP SQ

300x600 / 12"x24"
SP SQ

150x600 / 6"x24"
SP SQ



Stucchi consigliati
Recommended grouts

KERAKOLL	11	
MAPEI	114 Antracite	
LATICRETE	45 Raven	



VIRIDIUM
LY06

9 mm

600x1200 / 24"x48"
SP SQ

600x600 / 24"x24"
SP SQ

300x600 / 12"x24"
SP SQ

150x600 / 6"x24"
SP SQ



Stucchi consigliati
Recommended grouts

KERAKOLL	19	
MAPEI	114 Antracite	
LATICRETE	45 Raven	



INDIO
LY07

9 mm

600x1200 / 24"x48"
SP SQ

600x600 / 24"x24"
SP SQ

300x600 / 12"x24"
SP SQ

150x600 / 6"x24"
SP SQ



Stucchi consigliati
Recommended grouts

KERAKOLL	15	
MAPEI	114 Antracite	
LATICRETE	45 Raven	



PUMPKIN
LY08

± 9 mm

600x1200 / 24"x48"
SP SQ

600x600 / 24"x24"
SP SQ

300x600 / 12"x24"
SP SQ

150x600 / 6"x24"
SP SQ



Stucchi consigliati
Recommended grouts












KERAKOLL	31
MAPEI	112 Grigio Medio
LATICRETE	78 Sterling Silver








FLOOR . PUMPKIN LY08 SP 600x600 / 24"x24"











RIASSUNTIVO FORMATI E IMBALLI
SUMMARY OF SIZES AND PACKAGING
ÜBERSICHT ÜBER FORMATE UND VERPACKUNGEN
RÉCAPITULATIF FORMATS ET EMBALLAGES
SINÓPTICO DE FORMATOS Y EMBALAJES
规格和包装概述

						
	150x600 6"x24"	300x600 12"x24"	600x600 24"x24"	600x1200 24"x48"	1200x1200 48"x48"	1200x2780 48"x110"
FORMATI - SIZES						
Spessore - Thickness	± 9 mm	± 9 mm	± 9 mm	± 9 mm	± 9 mm	± 6 mm
Superficie - Surface	SP SQ	SP SQ	SP SQ	SP SQ	SP SQ	SP SQ
 Palladium LY 01	AR5V	UR56	UP94	UQ03	ADY2	US07
 Venom LY 04	AR5Y	UR59	UP97	UQ06	ADY7	US10
 Viridium LY 06	AR6A	UR61	UP99	UQ08	-	-
 Indio LY 07	ADM5	UR62	UQ01	UQ10	-	-
 Pumpkin LY 08	AR6B	UR63	UQ02	UQ11	-	-

 Peso lordo per scatola Gross weight per box Brütogewicht pro Karton Poids brut par boîte Peso bruto por caja Вес брутто коробки	26,92	25,78	22,26	29,57	62,21	Please refer to: mirrella.com
 Pezzi per scatola Pieces for box Stück pro Karton Pièces pour boîte Piezas por caja Штук в коробке	14	7	3	2	2	
 mq. scatola mq. box mq. Karton mq. boîte mq. caja кв.м в коробке	1,26	1,26	1,08	1,44	2,88	
 Scatole / full pallet Boxes / full pallet Stück / volle Palette Pièces / palette complete Cajas / pallet completo Коробок в палете	40	40	40	35	20	
 mq./pallet	50,40	50,40	43,20	50,40	57,60	

A: Disponibile - Available

* Decoro su rete - Mesh-backed decoration

									
Mosaico 36T*	Plume	Foliage	Battiscopa	Grad. B Ang.	Gradino B	Gradino A	Gradino G		
300x300 12"x12"	300x300 12"x12"	323x305 12 ³ / ₄ "x12"	72x600 27 ⁷ / ₈ "x24"	330x330 13 ¹ / ₅ "x13 ¹ / ₅ "	330x600 13 ¹ / ₅ "x24"	330x1200 13 ¹ / ₅ "x48"	300x600 12"x24"		
DECORI - DECORS			PEZZI SPECIALI - SPECIAL PIECES						
SP	SP	SP	SP	SP	SP	SP	SP		
ADC6	ADF0	ADD4	ADB8	ACX0	ACX8	ACY6	ACZ4	ADA2	ADB0
ADC9	ADF3	ADD7	ADC1	ACX3	ACY1	ACY9	ACZ7	ADA5	ADB3
ADD1	ADF5	ADD9	ADC3	ACX5	ACY3	ACZ1	ACZ9	ADA7	ADB5
ADD2	ADF6	ADE0	ADC4	ACX6	ACY4	ACZ2	ADA0	ADA8	ADB6
ADD3	ADF7	ADE1	ADC5	ACX7	ACY5	ACZ3	ADA1	ADA9	ADB7

-	-	-	-	-	-	-	-	-	-
6	6	10	10	4	4	2	7	4	7
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

SP: Spazzolato




CARATTERISTICHE TECNICHE
TECHNICAL SPECIFICATIONS - TECHNISCHE EIGENSCHAFTEN
CARACTÉRISTIQUES TECHNIQUES - CARACTERÍSTICAS TÉCNICAS
ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ - 技术特征

STANDARD EN 14411 - G

	CARATTERISTICHE TECNICHE TECHNICAL DATA TECHNISCHE DATEN CARACTERISTIQUES TECHNIQUES CARACTERÍSTICAS TÉCNICAS ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ 技术特征	NORMA STANDARD NORM NORME NORMA ЗНАЧЕНИЯ 标准	VALORI PRESCRITTI DALLE NORME EN 14411 - G INTERNATIONAL STANDARDS EN 14411 - G INTERNATIONALE NORMWERTE EN 14411 - G VALEURS PREVUES PAR LES NORMES EN 14411 - G VALORES PREVISTOS POR LAS NORMAS EN 14411 - G ПРЕДУСМОТРЕННЫЕ СТАНДАРТОМ EN 14411-G EN 14411 - G标准规定值	Urban Scratch
	CARATTERISTICHE DIMENSIONALI - SIZE CHARACTERISTICS - MASSEIGENSCHAFTEN DETERMINATION DES CARACTERISTIQUES DIMENSIONNELLES - CARACTERÍSTICAS DIMENSIONALES - РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ - 尺寸特征			
	LATI SIDES - SEITEN COTES - CANTOS РАЗМЕРЫ СТОРОН - 側边	EN ISO 10545-2	± 0,3% MAX (± 1,0 mm MAX)	CONFORME COMPLYING
	SPESSORE THICKNESS - DICKE ÉPAISSEUR - ESPESOR ТОЛЩИНА - 厚度	EN ISO 10545-2	± 5,0% MAX (± 0,5 mm MAX)	CONFORME COMPLYING
	RETTILINEITÀ DEGLI SPIGOLI STRAIGHTNESS OF SIDES - GERADLINIGKEIT DER KANTEN RECTITUDE DES ARETES - RECTITUD DE LOS CANTOS КОСУГОЛЬНОСТЬ - 边角平直度	EN ISO 10545-2	± 0,3% MAX (± 0,8 mm MAX)	CONFORME COMPLYING
	ORTOGONALITÀ RECTANGULARITY - RECHTWINKLIGKEIT PERPENDICULARITÉ - ORTOGONALIDAD КРИВИЗНА СТОРОН - 直角度	EN ISO 10545-2	± 0,3% MAX (± 1,5 mm MAX)	CONFORME COMPLYING
	PLANARITÀ SURFACE FLATNESS - EBENFLÄCHIGKEIT PLANEITE DE SURFACE - PLANEIDAD КРИВИЗНА ЛИЦЕВОЙ ПОВЕРХНОСТИ - 平整度	EN ISO 10545-2	± 0,4% MAX (± 1,8 mm MAX)	CONFORME COMPLYING
	ASSORBIMENTO D'ACQUA WATER ABSORPTION - WASSERAUFNAHME ABSORPTION D'EAU - ABSORCIÓN DE AGUA ВОДОПОГЛОЩЕНИЕ - 吸水率	EN ISO 10545-3	≤ 0,5%	≤ 0,1%
	RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE - BIEGEFESTIGKEIT RESISTANCE A LA FLEXION - RESISTENCIA A LA FLEXIÓN ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ - 抗弯强度	EN ISO 10545-4	S ≥ 700 N (< 7,5 mm) S ≥ 1.300 N (> 7,5 mm) R ≥ 35 N/mm².	≠6 mm: S ≥ 1100 N R ≥ 45 N/mm² ≠9 mm: S ≥ 2.400 N R ≥ 48 N/mm² ≠20 mm: S ≥ 12.500 N R ≥ 48 N/mm²
	RESISTENZA ALL'URTO IMPACT RESISTANCE - STOSSFESTIGKEIT RESISTANCE AUX CHOCES - RESISTENCIA A LOS GOLPES УДАРОСТОЙКОСТЬ - 抗冲击强度	EN ISO 10545-5	VALORE DICHIARATO DECLARED VALUE	> 0,80
	RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE - ABRIEBFESTIGKEIT RESISTANCE A L'ABRASION - RESISTENCIA A LA ABRASIÓN СТОЙКОСТЬ К ИСТИРАНИЮ - 耐磨强度	EN ISO 10545-6	≤ 175 mm³	< 150 mm³
	COEFFICIENTE DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL EXPANSION - LINEARER WÄRMEAUDEHNUNGSKOEFFIZIENT COEFFICIENT DE DILATATION THERMIQUE LINEAIRE - COEFFICIENTE DE DILATACIÓN TÉRMICA LINEAL КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСШИРЕНИЯ - 线性热膨胀系数	EN ISO 10545-8	—	α=6,6x10 ⁻⁶ °C ⁻¹
	RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCKS - BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN RESISTANCE AUX CHOCES THERMIQUES - RESISTENCIA A LOS CHOQUES TÉRMICOS СТОЙКОСТЬ К ПЕРЕПАДАМ ТЕМПЕРАТУРЫ - 耐热突变性	EN ISO 10545-9	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE
	RESISTENZA AL GELO FROST RESISTANCE - FROSTBESTÄNDIGKEIT RESISTANCE AU GEL - RESISTENCIA AL HIELO МОРОЗОСТОЙКОСТЬ - 耐冻性	EN ISO 10545-12	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE
	RESISTENZA ALL'ATTACCO CHIMICO RESISTANCE TO CHEMICALS - CHEMIKALIENBESTÄNDIGKEIT RESISTANCE A L'ATTAQUE CHIMIQUE - RESISTENCIA QUÍMICA ХИМИЧЕСКАЯ СТОЙКОСТЬ - 耐化学品作用	EN ISO 10545-13	UB MIN.	A LA HA
	RESISTENZA ALLE MACCHIE RESISTANCE TO STAINS - FLECKENBESTÄNDIGKEIT RESISTANCE AUX TACHES - RESISTENCIA A LAS MANCHAS УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ - 防污性	EN ISO 10545-14	VALORE DICHIARATO DECLARED VALUE	5
	CESSIONE DI PIOMBO E CADMIO LEAD AND CADMIUM DISCHARGE - ABGABE VON BLEI UND CADMIUM PERTE DE PLOMB ET CADMIUM - CESIÓN DE PLOMO Y CADMIO ВЫДЕЛЕНИЕ СВИНЦА И КАДМИЯ - 铅和镉的排放	EN ISO 10545-15	VALORE DICHIARATO DECLARED VALUE	< AL LIMITE DI RILEVAMENTO < THAN INSTRUMENT LIMIT
				SP
		DM 236/89 BCRA	> 0,40	> 0,40
		ANSI A326.3	Wet and Dry	≥ 0,42
		AS 4586	-	P2
		DIN 51130	-	R9
		DIN 51097	-	-
		UNE 41901	≥ CL1	CL1
		BS 7976 sl.96-4S	Wet and Dry	-
		BS 7976 sl.55-TRL	Wet and Dry	-
	SCIVOLOSITÀ SKID RESISTANCE - RUTSCHWERT GLISSANCE - ADHERENCIA СКОЛЬЗКОСТЬ - 防滑性			

INSPIRING
BETTER
LIVING



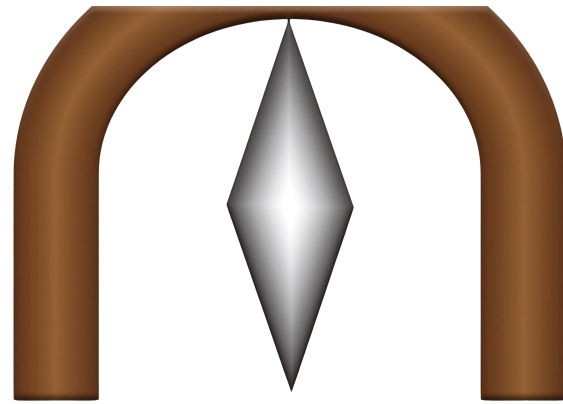

**MIRRELLA
TILE**

WWW.MIRRELLA.COM